


THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF TANDON. NO PORTION OF THIS DATA SHALL BE RELEASED, DISCLOSED, USED, OR DUPLICATED, FOR USE IN PROCUREMENT OR MANUFACTURING WITHOUT SPECIFIC, WRITTEN PERMISSION FROM TANDON.

LOGIC SCHEMATIC

NOTES: UNLESS OTHERWISE SPECIFIED


1. ALL RESISTORS ARE IN OHMS, 1/4 W, 5%
2. ALL CAPS ARE IN uFD.
3. ALL DIODES ARE IN 4446.
4. ALL TRANSISTORS NPN ARE 2N4124 & PNP ARE 2N4125.

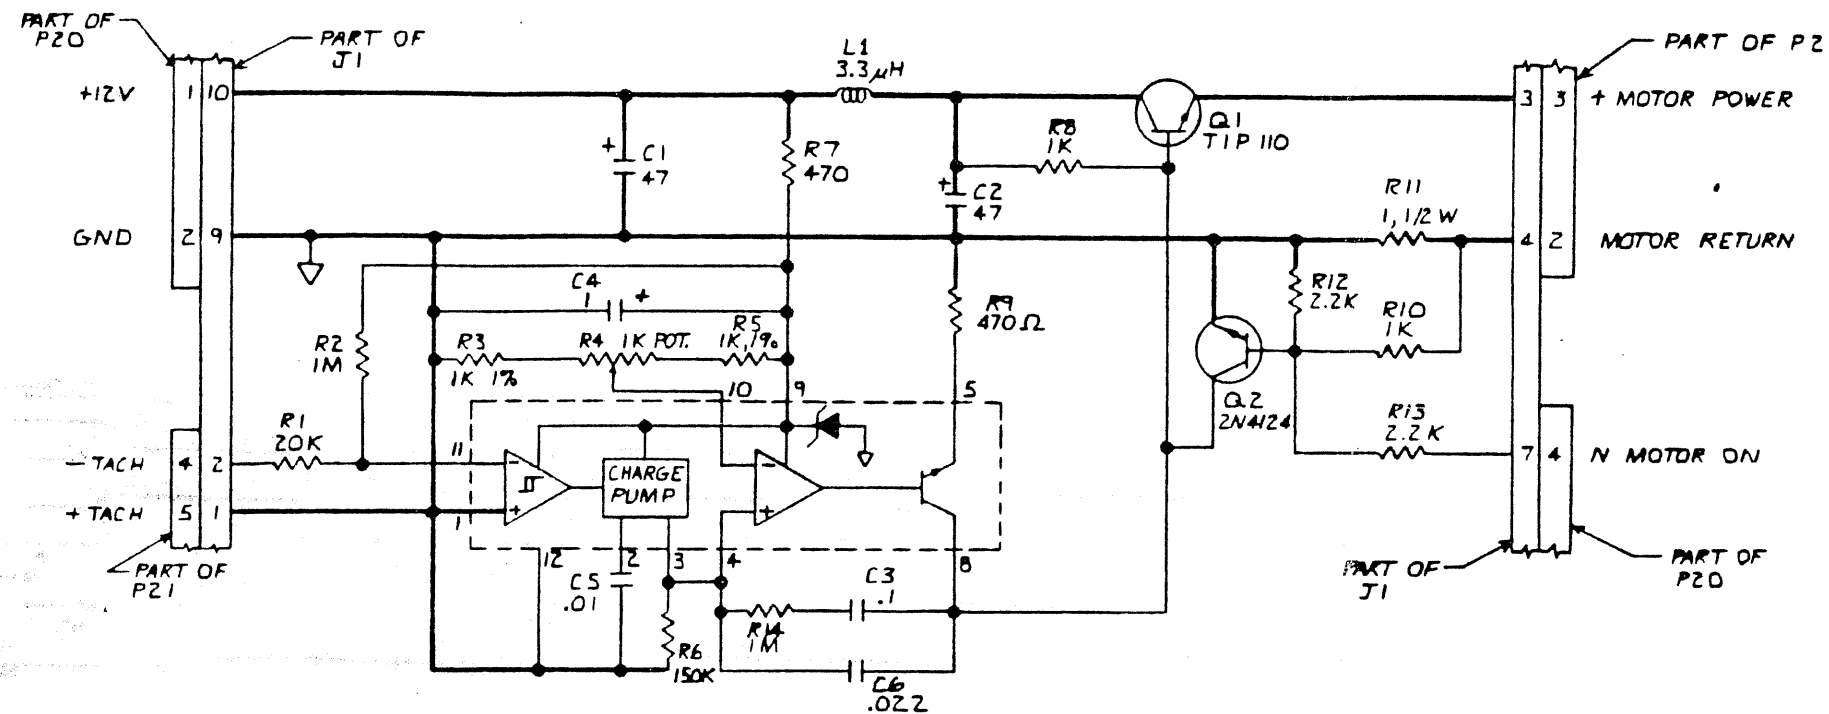

NOTES: UNLESS OTHERWISE SPECIFIED

1. RESISTORS ARE IN OHMS, $\pm 5\%$, 1/4 W.
2. 1% RESISTORS ARE 1/8 W.
3. CAPACITORS ARE IN μF , $\pm 20\%$, 35 V.

**SERVO PCBA,
LINEAR**

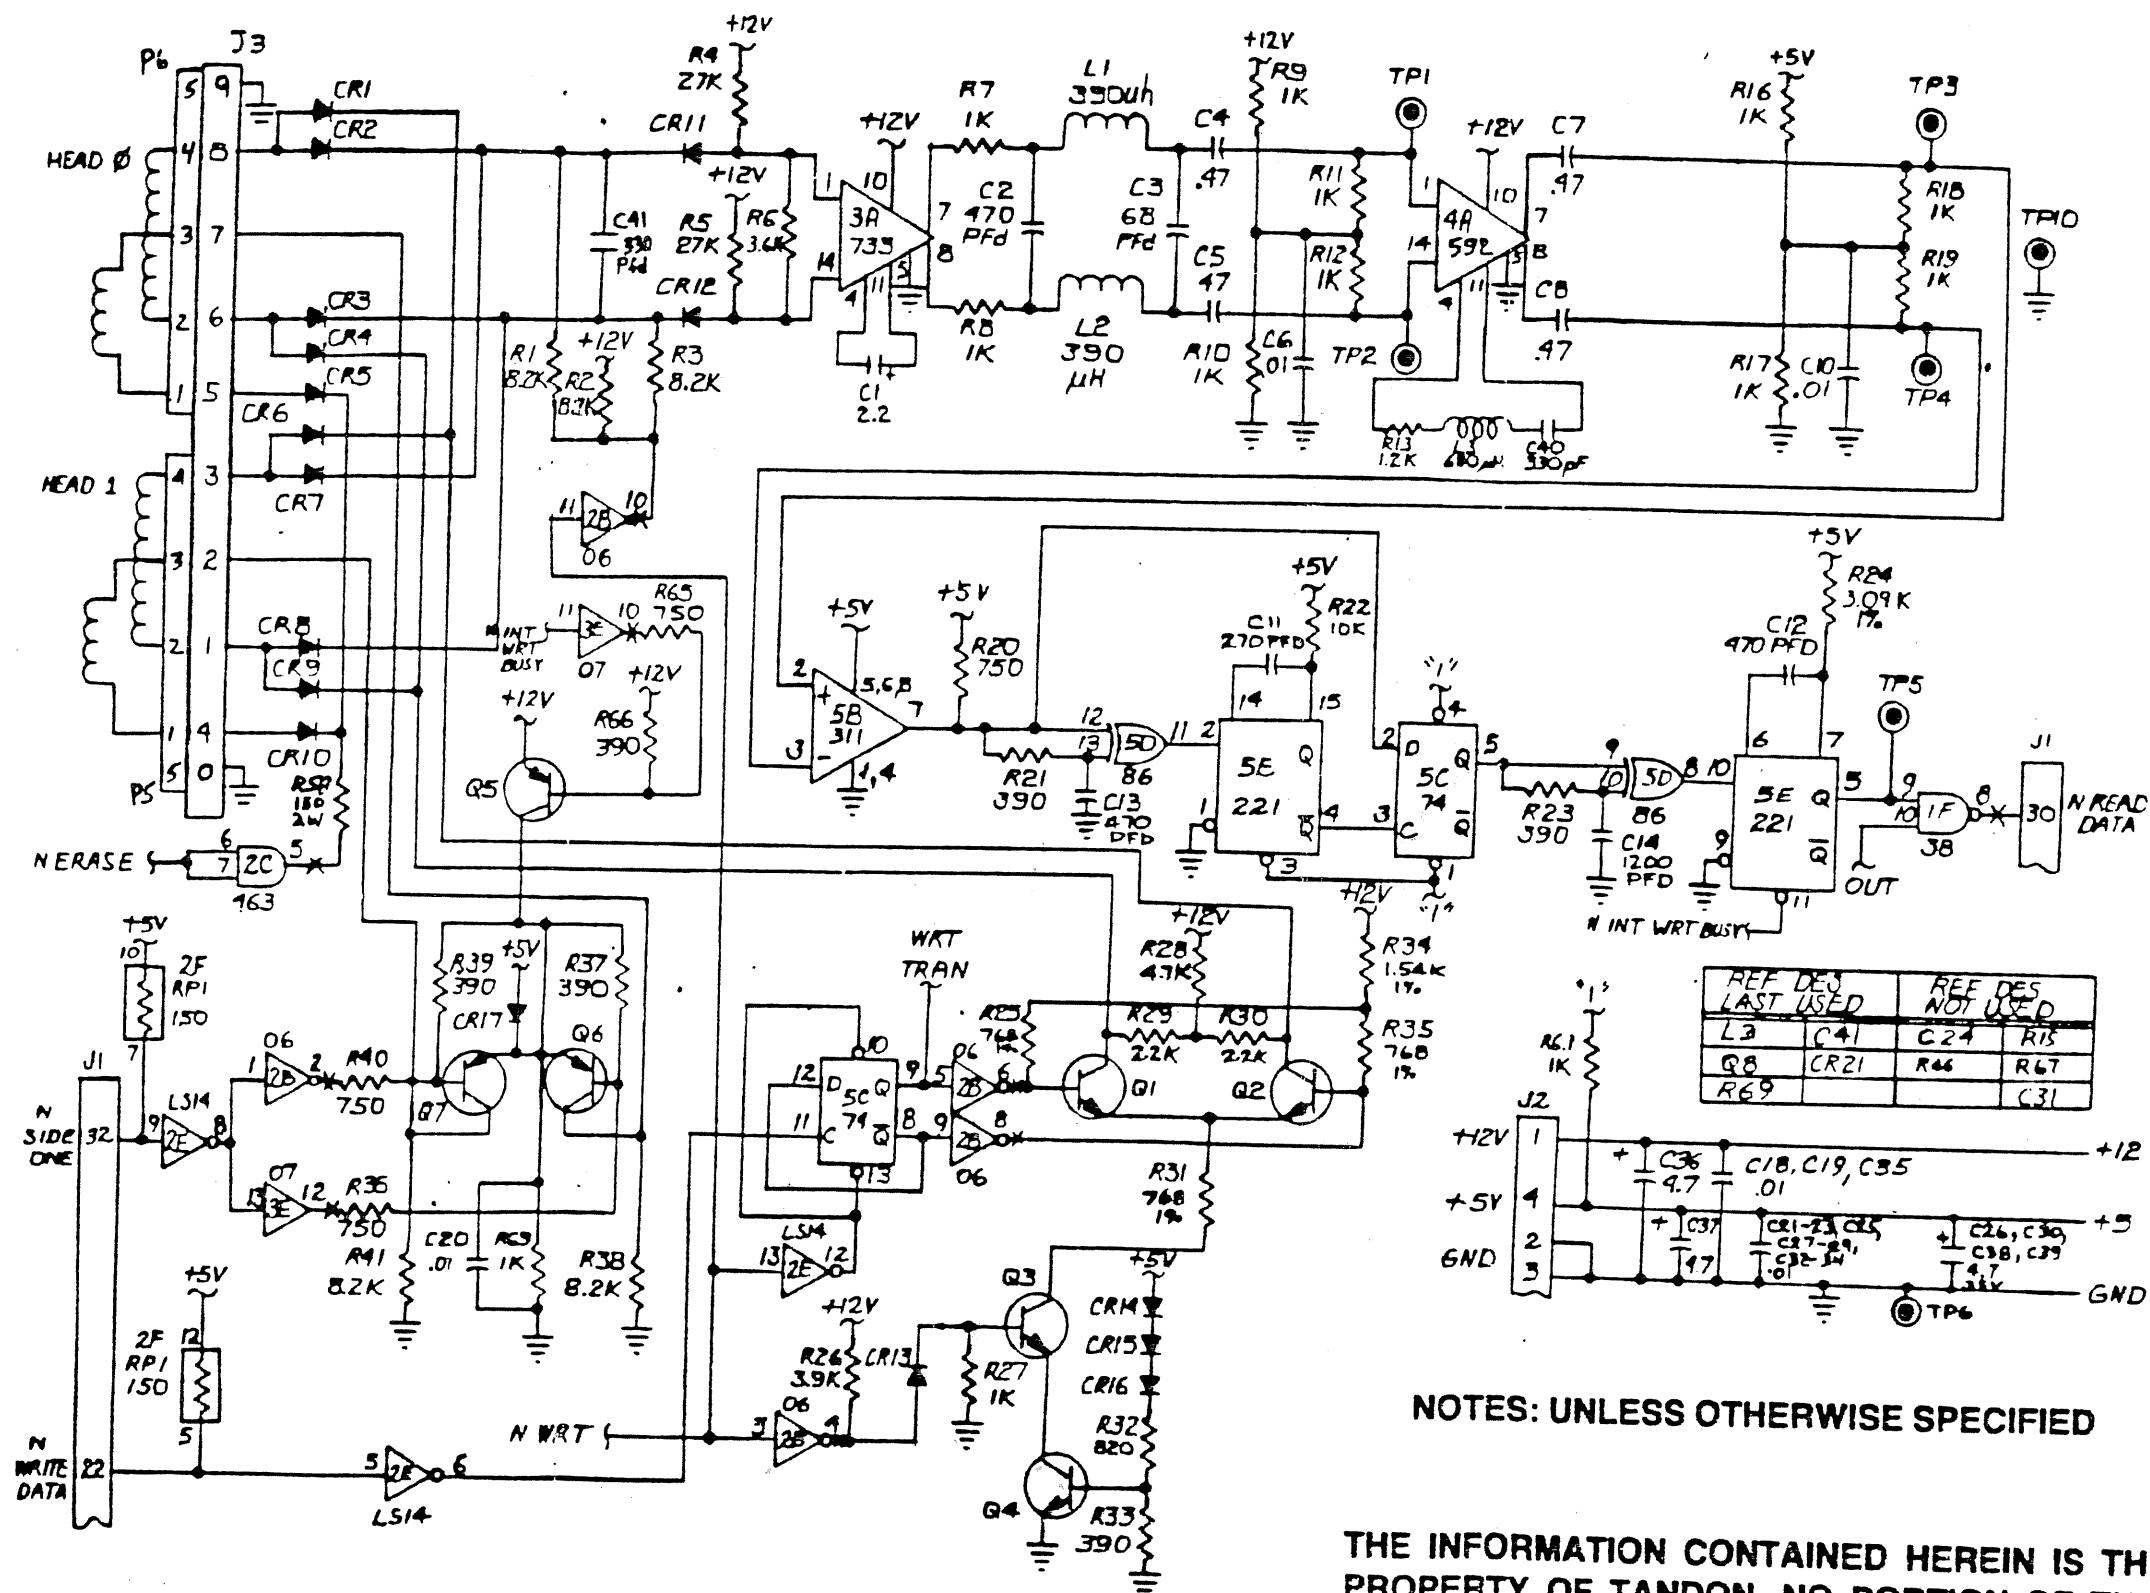

LOGIC SCHEMATIC

NOTES: UNLESS OTHERWISE SPECIFIED

THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF TANDON. NO PORTION OF THIS DATA SHALL BE RELEASED, DISCLOSED, USED, OR DUPLICATED, FOR USE IN PROCUREMENT OR MANUFACTURING WITHOUT SPECIFIC, WRITTEN PERMISSION FROM TANDON.

